

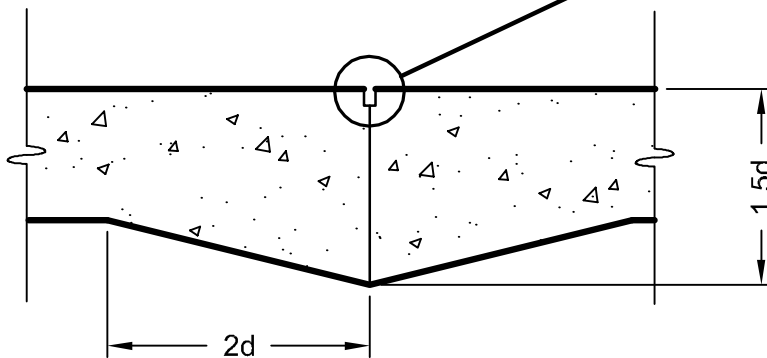



KEYED CONSTRUCTION JOINT

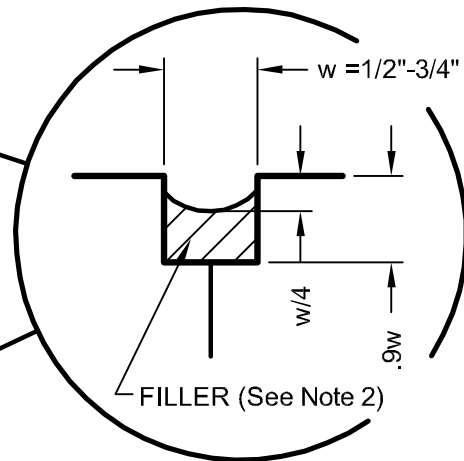

THICKENED EDGE CONSTRUCTION JOINT

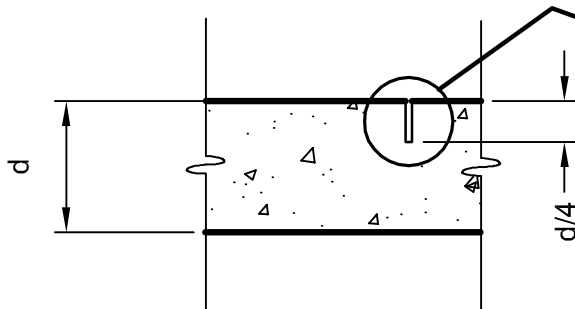

CONTROL JOINT

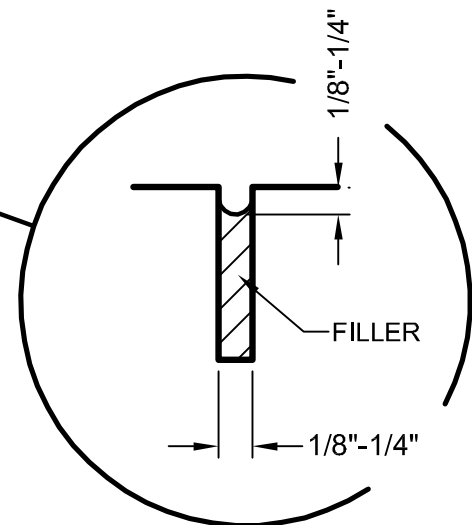

NOTES:

1. Control joints may be tooled, impressed, or sawn.
2. Sawn or open tooled joints shall be filled with approved elastomeric filler.

AutoCAD: Joints - Concrete Pavement

dwc 3-00
DRR

CONCRETE PAVEMENT JOINT ALTERNATIVES

PAGE NO:

4

CITY OF PULLMAN
ENGINEERING DIVISION

ADOPTED: April 8, 2008